

## 2.5A 150KHz 50V Synchronous Buck DC to DC Converter

XL9022

### Features

- Operation Voltage: 5V~45V
- Output Adjustable from 1.25V to 40V
- Maximum Duty Cycle up to 90%
- Feedback Voltage Accuracy  $\pm 2\%$
- Fixed 150KHz Switching Frequency
- 2.5A Constant Output Current Capability
- Internal Optimize Power MOSFET
- High efficiency up to 95%
- Max. Output power up to 15W
- Excellent line and load regulation
- EN PIN TTL shutdown capability
- Built in thermal shutdown function
- Built in current limit protection function
- Built in output short protection function
- Temperature Grade 1:  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$   
Ambient Operating Temperature Range
- Device HBM ESD Classification Level  
Class3B
- Available in SOP8-EP package

### General Description

The XL9022 is a 150KHz fixed frequency PWM synchronous buck DC/DC converter, capable of driving a 2.5A load with high efficiency, low ripple and excellent line and load regulation. XL9022 supports wide input operating voltage range of 5V ~ 45V and a maximum duty cycle of 90% output. A built-in loop compensation module reduces components in the system, lowering power system cost and reducing printed circuit board space. The XL9022 has built-in thermal shutdown, current limit protection and output short protection function and so on. When the output short protection function happens, the operation frequency will be reduced about from 150KHz to 40KHz.

### Applications

- Automotive Electronics
- Industrial Control
- Networking Equipment
- Internet of Things

### Typical application schematic

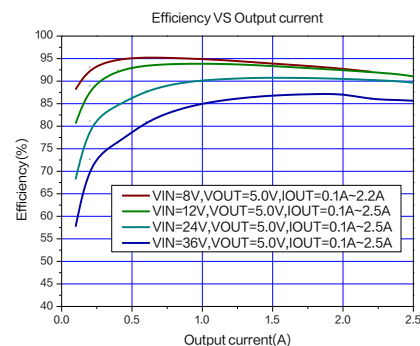
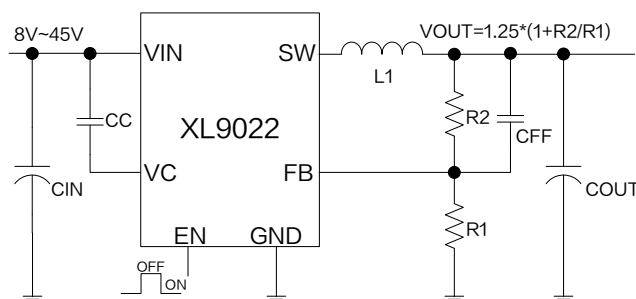


Figure1. XL9022 Typical application schematic and efficiency curve

### Pin Configurations

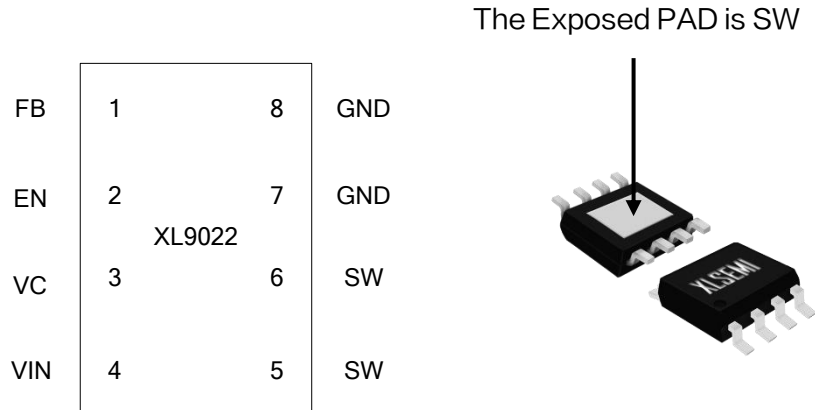


Figure2. Pin Configuration of XL9022

Table 1 Pin Description

Pin Number	Pin Name	Description
1	FB	Feedback Pin (FB). Through an external resistor divider network, Feedback senses the output voltage and regulates it. The feedback threshold voltage is 1.25V.
2	EN	Enable Pin. Drive EN pin high to turn off the device, drive it low to turn it on. Floating is default low. Connect to GND to enable the voltage regulator.
3	VC	Internal Voltage Regulator Bypass Capacity. In typical system application, The VC pin connect a 1uF capacitor to VIN.
4	VIN	Supply Voltage Input Pin. XL9022 operates from 5V to 45V DC voltage. Bypass Vin to GND with a suitably large capacitor to eliminate noise on the input.
5,6	SW	Power Switch Output Pin (SW). Output is the switch node that supplies power to the output.
7,8	GND	Ground Pin.

### Ordering Information

Order Information	Marking ID	Package Type	Eco Plan	Packing Type Supplied As
XL9022E1	XL9022E1	SOP8-EP	RoHS & HF	4000 Units on Reel

### Function Block

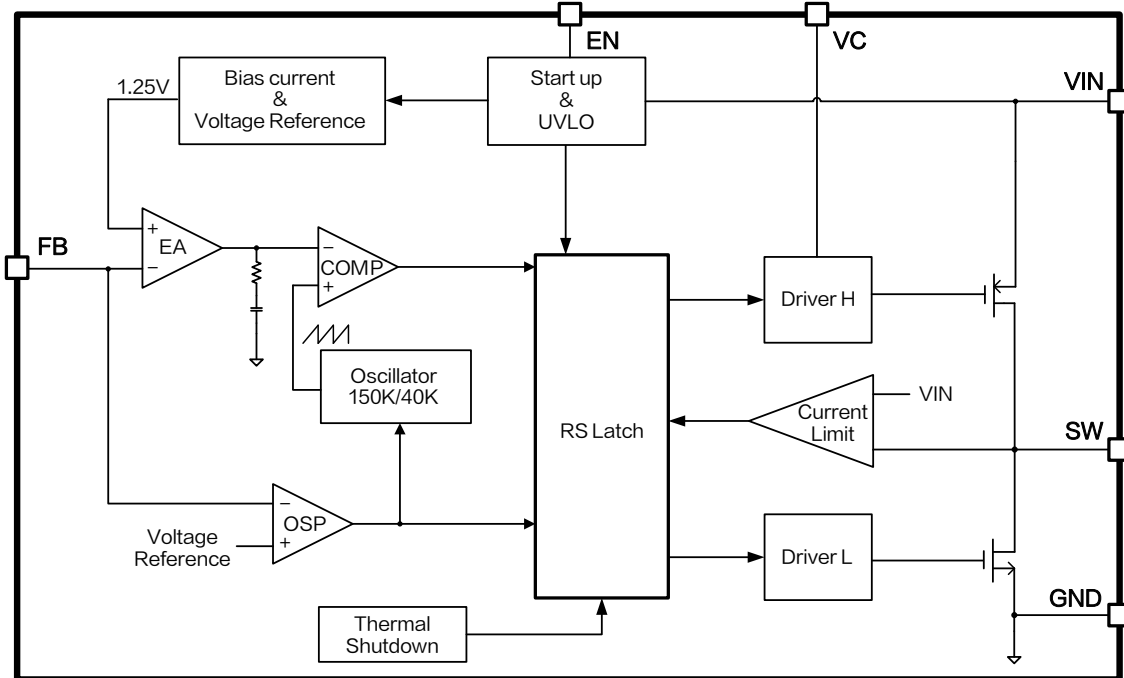


Figure3. Function Block Diagram of XL9022

### Absolute Maximum Ratings ( Note1 )

Parameter	Symbol	Value	Unit
Input Voltage	$V_{IN}$	-0.3~50	V
EN Pin Voltage	$V_{EN}$	-0.3~7	V
Feedback Pin Voltage	$V_{FB}$	-0.3~7	V
Output Switch Pin Voltage	$V_{SW}$	-0.3~ $V_{IN}$	V
Power Dissipation	$P_D$	Internally limited	mW
Thermal Resistance (SOP8-EP) (Junction to Ambient, No Heatsink, Free Air)	$R_{JA}$	60	°C/W
Operating Junction Temperature	$T_J$	-40~150	°C
Storage Temperature	$T_{STG}$	-65~150	°C
Lead Temperature (Soldering, 10 sec)	$T_{LEAD}$	260	°C
ESD (HBM)		>8000	V

**Note1:** Stresses greater than those listed under Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

## 2.5A 150KHz 50V Synchronous Buck DC to DC Converter

XL9022

### XL9022 Electrical Characteristics

$T_A = 25^\circ\text{C}$ ; system parameters test circuit figure6, unless otherwise specified.

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
$V_{FB}$	Feedback Voltage	$V_{IN}=12\text{V}, V_{OUT}=5.0\text{V}$ $I_{OUT}=0.5\text{A}$	1.225	1.25	1.275	V
$\eta$	Efficiency	$V_{IN}=12\text{V}, V_{OUT}=3.3\text{V}$ $I_{OUT}=1.0\text{A}$	-	91.1	-	%
$\eta$	Efficiency	$V_{IN}=12\text{V}, V_{OUT}=5.0\text{V}$ $I_{OUT}=1.0\text{A}$	-	93.5	-	%
$\eta$	Efficiency	$V_{IN}=24\text{V}, V_{OUT}=12\text{V}$ $I_{OUT}=0.5\text{A}$	-	93.4	-	%

### Electrical Characteristics (DC Parameters)

$T_A=25^\circ\text{C}, V_{IN}=12\text{V}$ ; system parameters test circuit figure6, unless otherwise specified.

Parameters	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input operation voltage	$V_{IN}$		5		45	V
Shutdown Supply Current	$I_S$	$V_{EN}=2\text{V}$		77	200	$\mu\text{A}$
Quiescent Supply Current	$I_Q$	$V_{EN}=0\text{V},$ $V_{FB}=2\text{V}$		2.5	5	mA
Oscillator Frequency	$F_{OSC}$		127	150	172	KHz
Switch Current Limit	$I_L$	$V_{FB}=0$		2.7		A
EN Pin Threshold	$V_{EN}$	High(OFF)	1.4			V
		Low(ON)			0.8	V
EN Pin Current	$I_{EN}$	$V_{EN}=2.0\text{V}$		5		$\mu\text{A}$
High side MOS On-resistance	$R_{DS(ON)H}$			68		$\text{m}\Omega$
Low side MOS On-resistance	$R_{DS(ON)L}$			50		$\text{m}\Omega$
Thermal Shutdown Temperature	$T_{SD}$			160		$^\circ\text{C}$
Thermal Shutdown Hysteresis	$T_D$			30		$^\circ\text{C}$

<b>2.5A 150KHz 50V Synchronous Buck DC to DC Converter</b>	<b>XL9022</b>
--	---------------

Typical System Application Schematic ( $V_{OUT}=3.3V$ ,  $I_{OUT}=0\sim 2.5A$ )

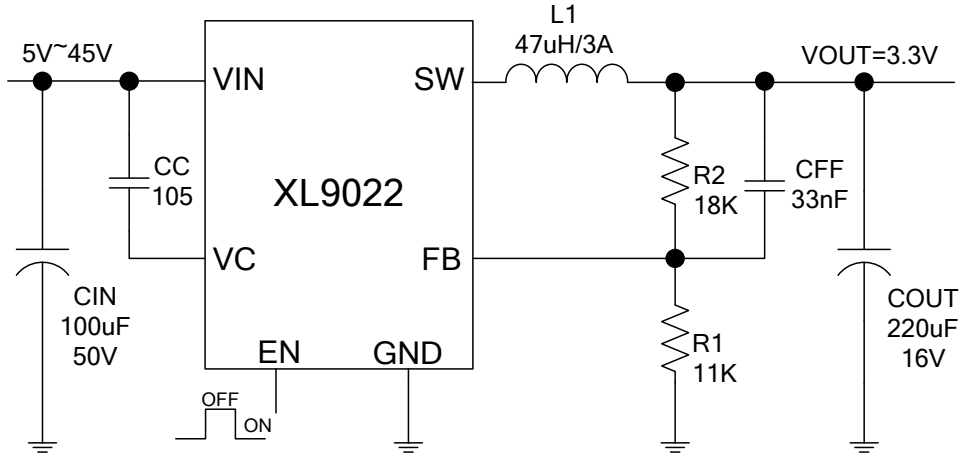


Figure4. XL9022 System Application ( $V_{IN}=5V\sim 45V$ ,  $V_{OUT}=3.3V$ ,  $I_{OUT}=0\sim 2.5A$ )

Typical System Application Transfer Efficiency

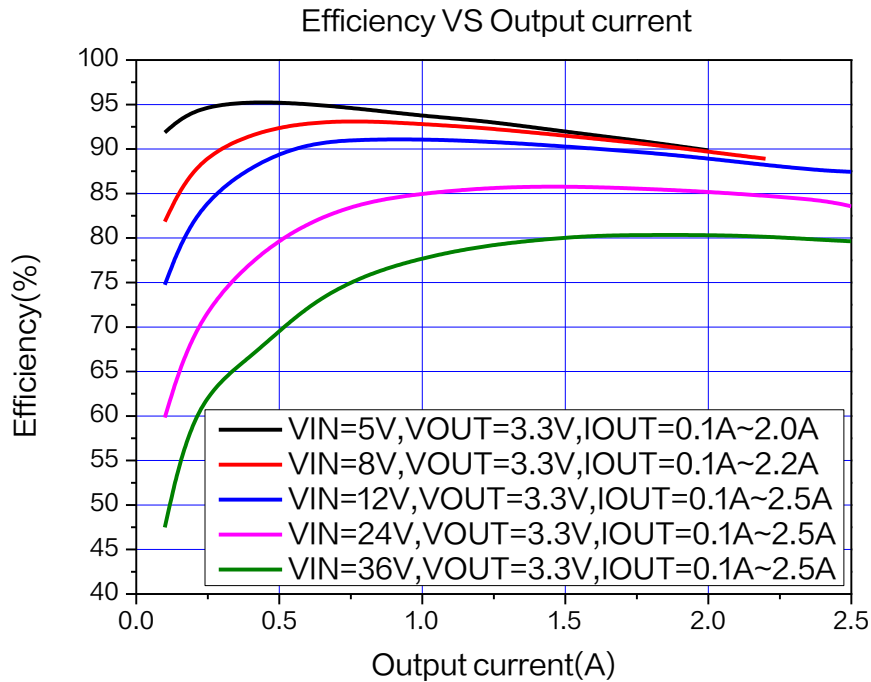


Figure5. XL9022 System Efficiency Curve ( $V_{OUT}=3.3V$ )

**2.5A 150KHz 50V Synchronous Buck DC to DC Converter** **XL9022**

Typical System Application Schematic ( $V_{OUT}=5.0V$ ,  $I_{OUT}=0\sim 2.5A$ )

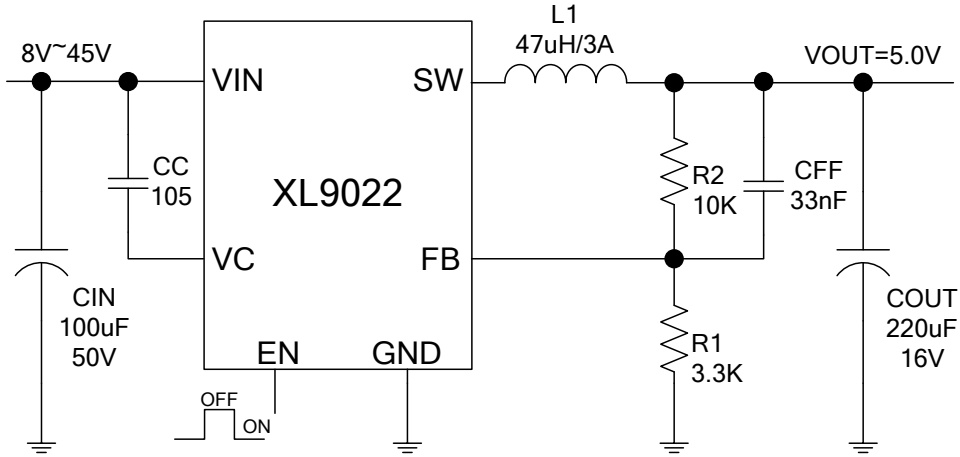


Figure6. XL9022 System Application ( $V_{IN}=8V\sim 45V$ ,  $V_{OUT}=5.0V$ ,  $I_{OUT}=0\sim 2.5A$ )

Typical System Application Transfer Efficiency

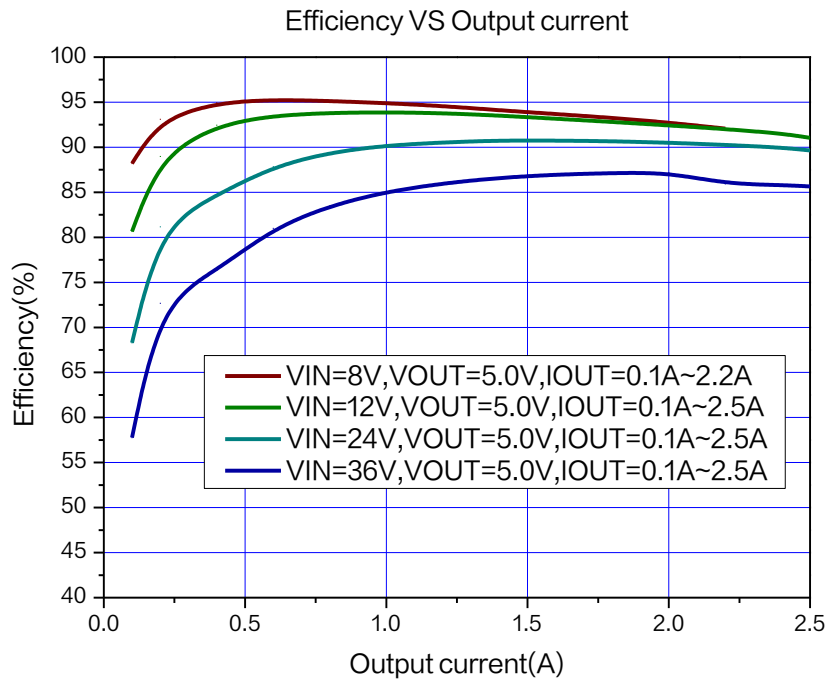


Figure7. XL9022 System Efficiency Curve ( $V_{OUT}=5.0V$ )

2.5A 150KHz 50V Synchronous Buck DC to DC Converter	XL9022
---	--------

### Typical System Application Schematic ( $V_{OUT}=12V, I_{OUT}=0\sim 1.5A$ )

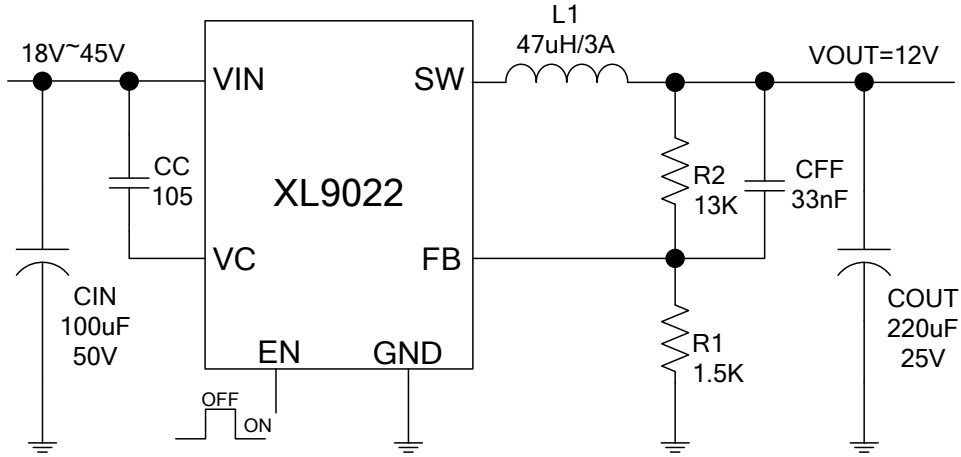


Figure8. XL9022 System Parameters Test Circuit ( $V_{IN}=18V\sim 45V, V_{OUT}=12V, I_{OUT}=0\sim 1.5A$ )

### Typical System Application Transfer Efficiency

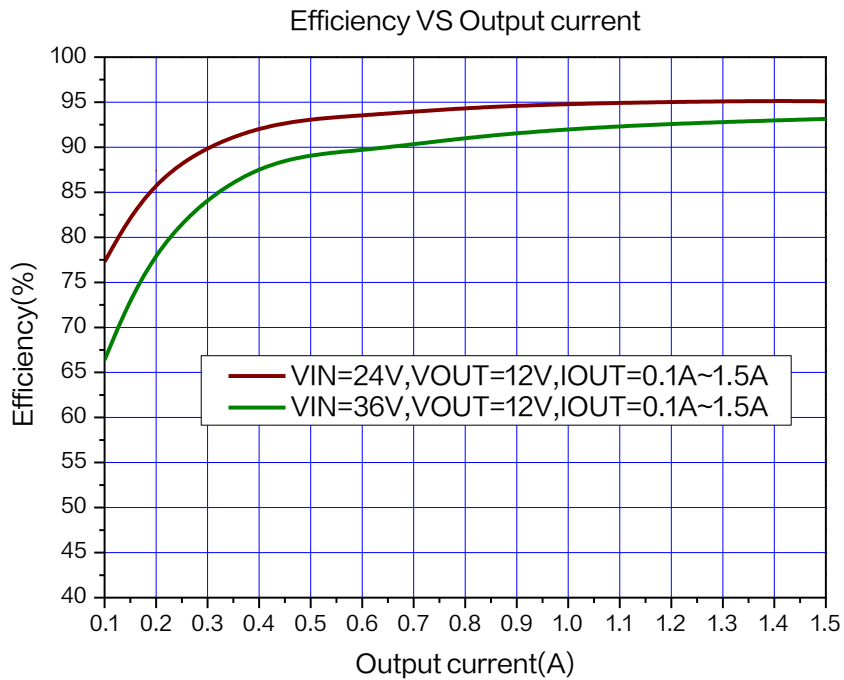


Figure9. XL9022 System Efficiency Curve ( $V_{OUT}=12V$ )

<b>2.5A 150KHz 50V Synchronous Buck DC to DC Converter</b>	<b>XL9022</b>
--	---------------

### Typical System Application Schematic ( $V_{OUT}=15V, I_{OUT}=0\sim 1.5A$ )

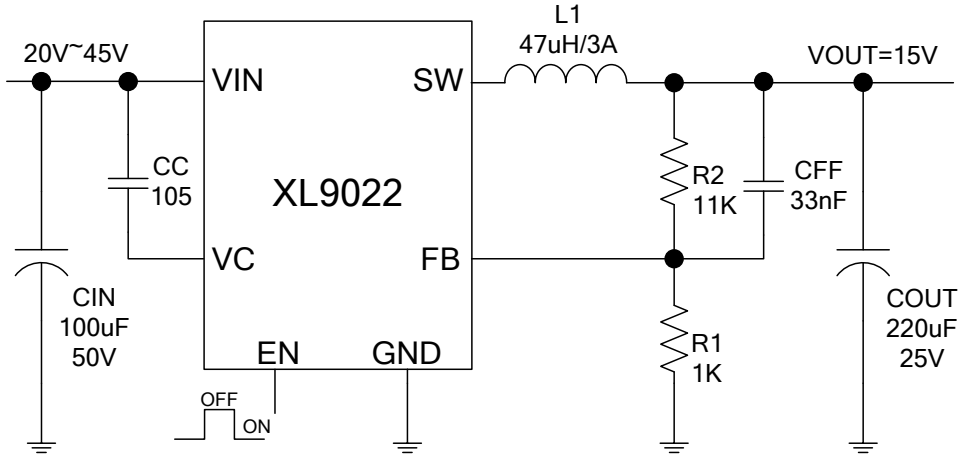


Figure10. XL9022 System Parameters Test Circuit ( $V_{IN}=20V\sim 45V, V_{OUT}=15V, I_{OUT}=0\sim 1.5A$ )

### Typical System Application Transfer Efficiency

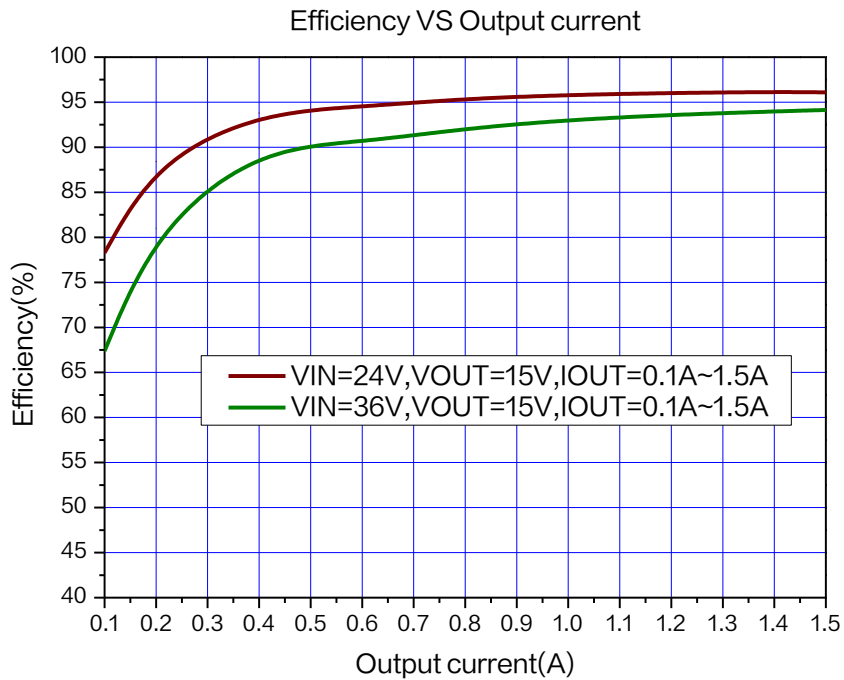


Figure11. XL9022 System Efficiency Curve ( $V_{OUT}=15V$ )



### Typical Characteristics

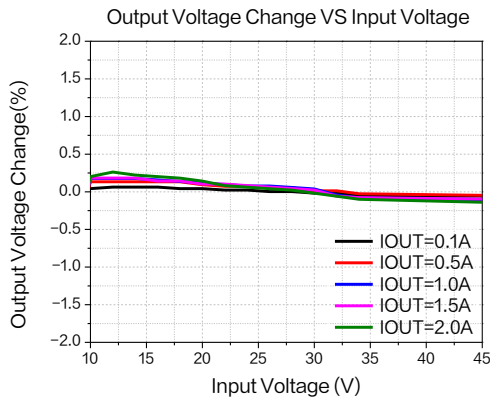


Figure12.Line Regulation

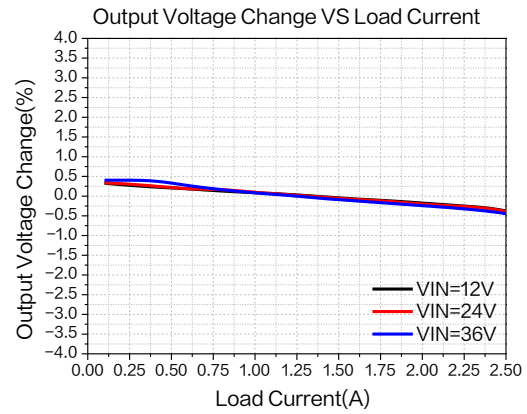


Figure13.Load Regulation

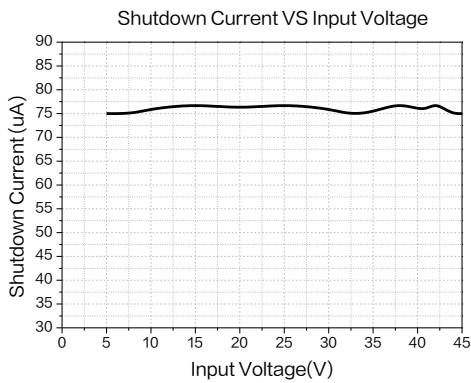


Figure14.Shutdown Current

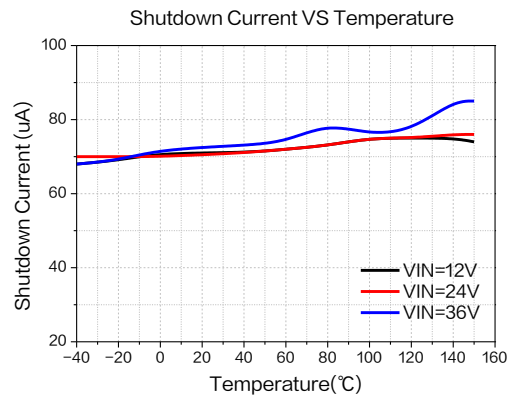


Figure15.Shutdown Current

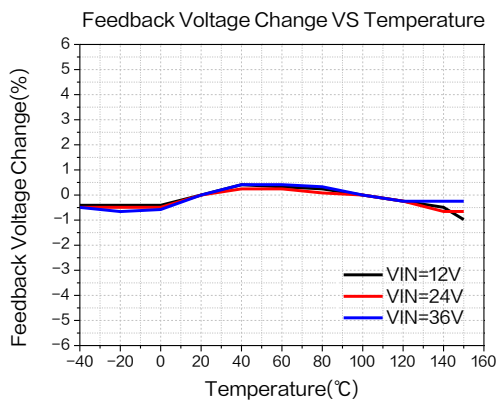


Figure16.Feedback Voltage Regulation

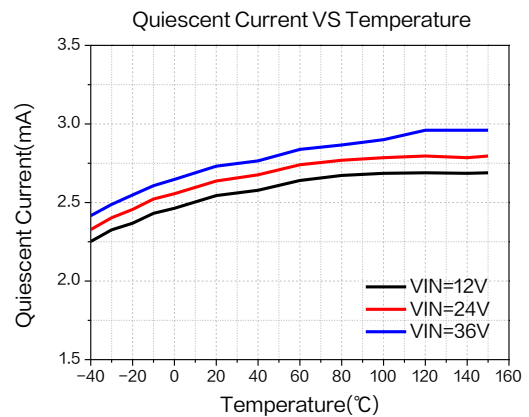


Figure17.Quiescent Current

## 2.5A 150KHz 50V Synchronous Buck DC to DC Converter

XL9022

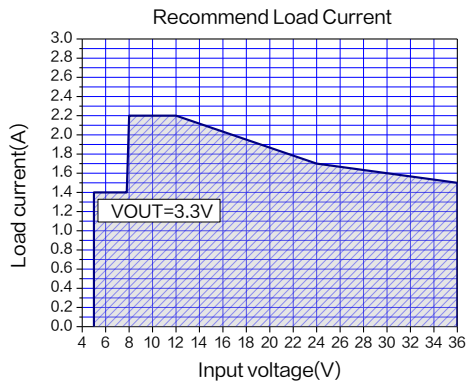


Figure 18.Max Output Current  
(V<sub>OUT</sub>=3.3V, T<sub>A</sub>=25°C)

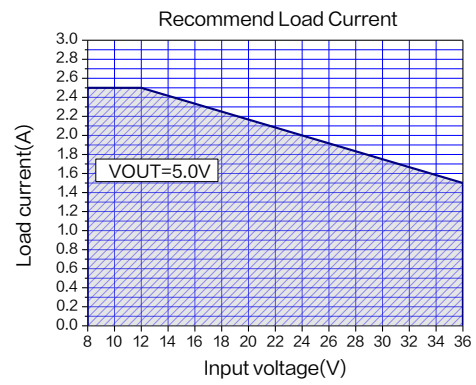


Figure 19.Max Output Current  
(V<sub>OUT</sub>=5.0V, T<sub>A</sub>=25°C)

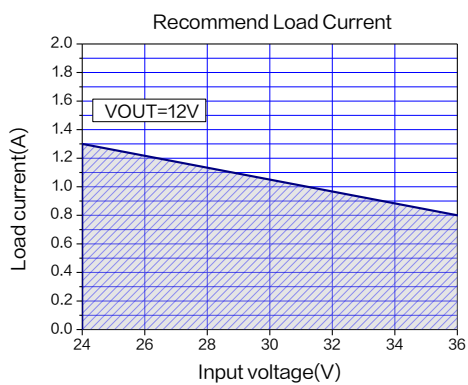


Figure 20.Max Output Current  
(V<sub>OUT</sub>=12V, T<sub>A</sub>=25°C)

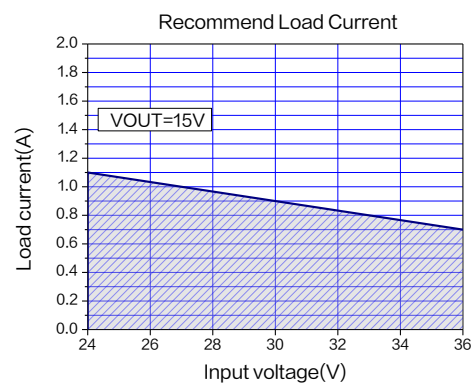


Figure 21.Max Output Current  
(V<sub>OUT</sub>=15V, T<sub>A</sub>=25°C)

## 2.5A 150KHz 50V Synchronous Buck DC to DC Converter

XL9022

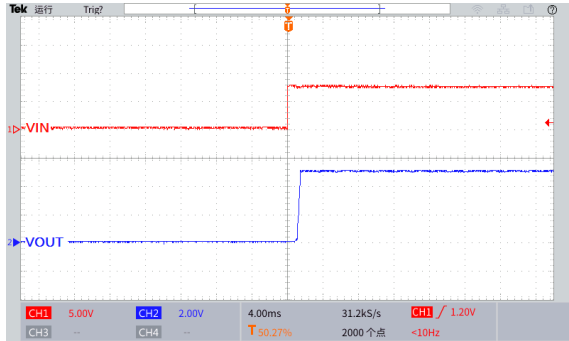


Figure 22. Start-Up Characteristic  
( $V_{IN}=8V$ ,  $V_{OUT}=5.0V$ ,  $I_{OUT}=0.1A$ )

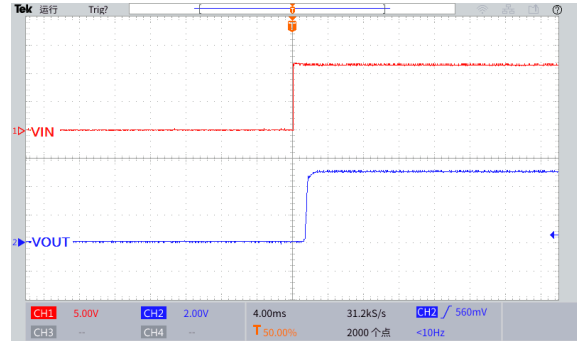


Figure 23. Start-Up Characteristic  
( $V_{IN}=12V$ ,  $V_{OUT}=5.0V$ ,  $I_{OUT}=0.1A$ )

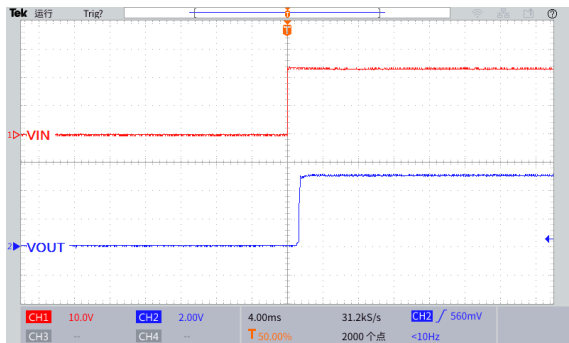


Figure 24. Start-Up Characteristic  
( $V_{IN}=24V$ ,  $V_{OUT}=5.0V$ ,  $I_{OUT}=0.1A$ )

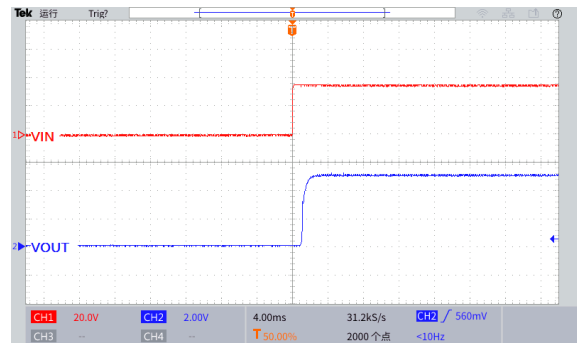


Figure 25. Start-Up Characteristic  
( $V_{IN}=36V$ ,  $V_{OUT}=5.0V$ ,  $I_{OUT}=0.1A$ )

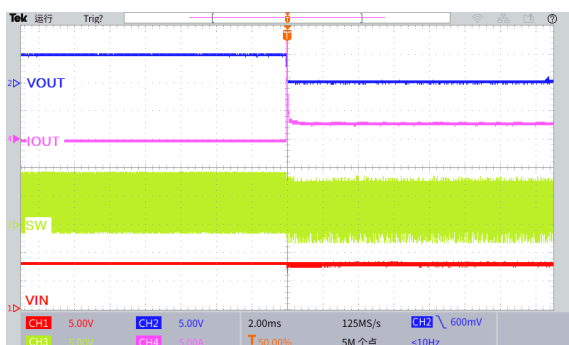


Figure 26. Output Short Circuit Waveform  
( $V_{IN}=8V$ ,  $V_{OUT}=5.0V$ )

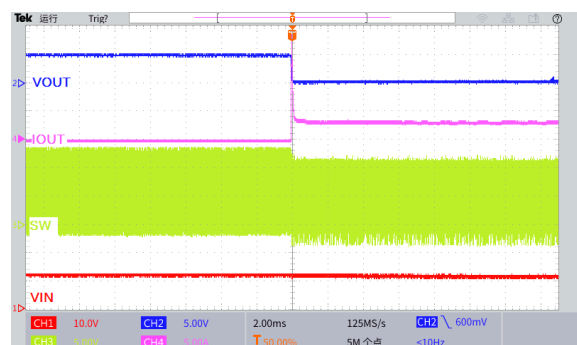


Figure 27. Output Short Circuit Waveform  
( $V_{IN}=12V$ ,  $V_{OUT}=5.0V$ )

## 2.5A 150KHz 50V Synchronous Buck DC to DC Converter

XL9022

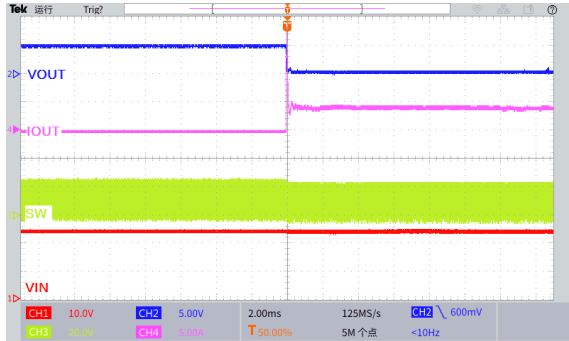


Figure 28. Output Short Circuit Waveform  
( $V_{IN}=24V$ ,  $V_{OUT}=5.0V$ )

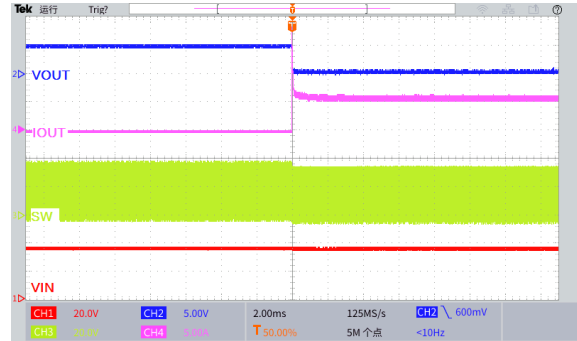


Figure 29. Output Short Circuit Waveform  
( $V_{IN}=36V$ ,  $V_{OUT}=5.0V$ )

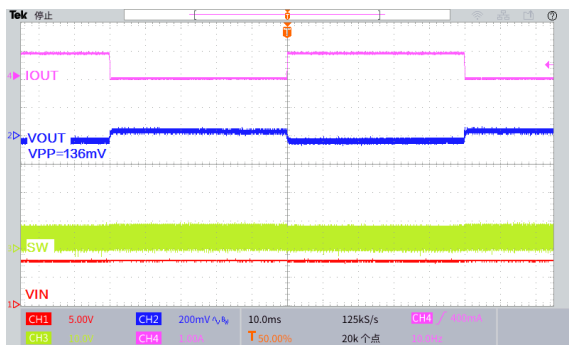


Figure30. Load Transient Response  
( $V_{IN}=8V$ ,  $V_{OUT}=5.0V$ ,  $I_{OUT}=0.1$  to 1A)

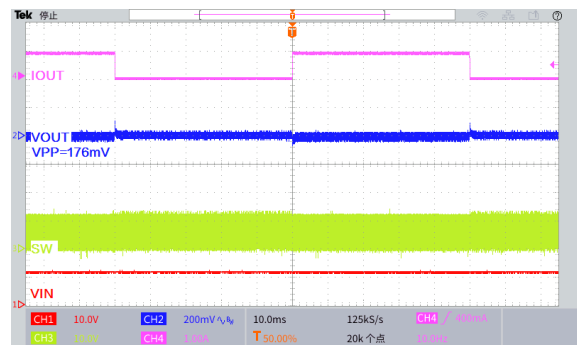


Figure31. Load Transient Response  
( $V_{IN}=12V$ ,  $V_{OUT}=5.0V$ ,  $I_{OUT}=0.1$  to 1A)

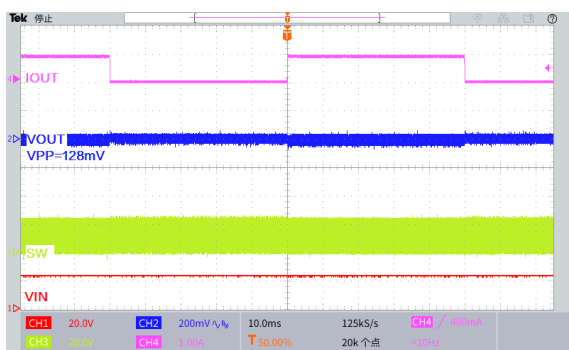


Figure32. Load Transient Response  
( $V_{IN}=24V$ ,  $V_{OUT}=5.0V$ ,  $I_{OUT}=0.1$  to 1A)

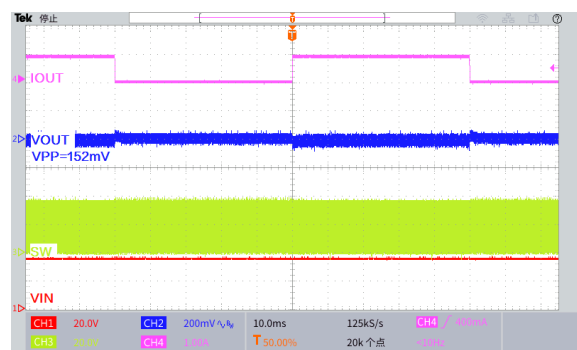


Figure33. Load Transient Response  
( $V_{IN}=36V$ ,  $V_{OUT}=5.0V$ ,  $I_{OUT}=0.1$  to 1A)

## 2.5A 150KHz 50V Synchronous Buck DC to DC Converter

XL9022

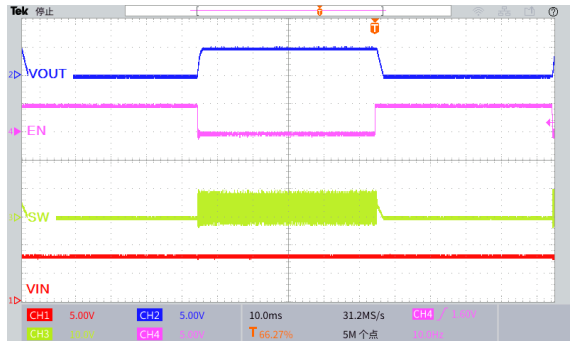


Figure34. Start or Shutdown Using EN Pin  
( $V_{IN}=8V$ ,  $V_{OUT}=5.0V$ ,  $I_{OUT}=0.5A$ )

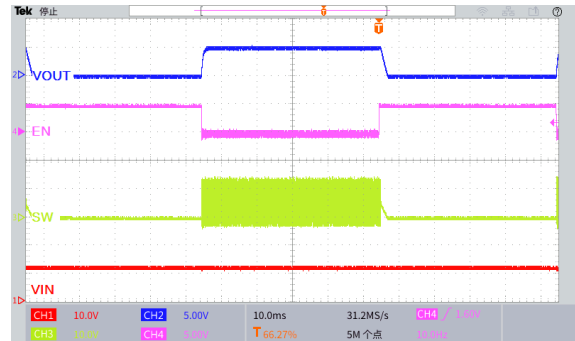


Figure35. Start or Shutdown Using EN Pin  
( $V_{IN}=12V$ ,  $V_{OUT}=5.0V$ ,  $I_{OUT}=0.5A$ )

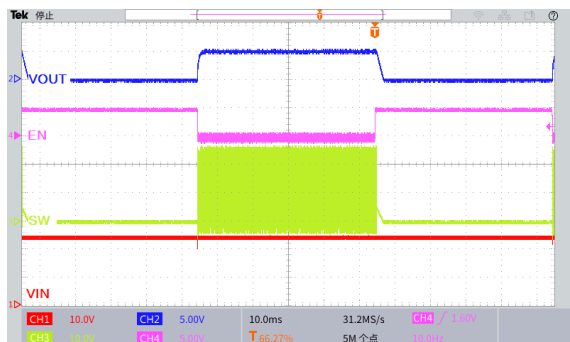


Figure36. Start or Shutdown Using EN Pin  
( $V_{IN}=24V$ ,  $V_{OUT}=5.0V$ ,  $I_{OUT}=0.5A$ )


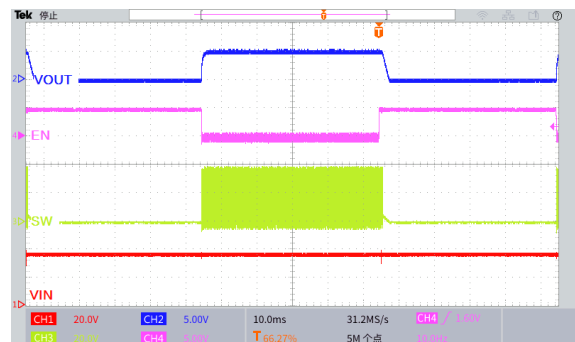


Figure37. Start or Shutdown Using EN Pin  
( $V_{IN}=36V$ ,  $V_{OUT}=5.0V$ ,  $I_{OUT}=0.5A$ )

### Package Information

#### SOP8-EP

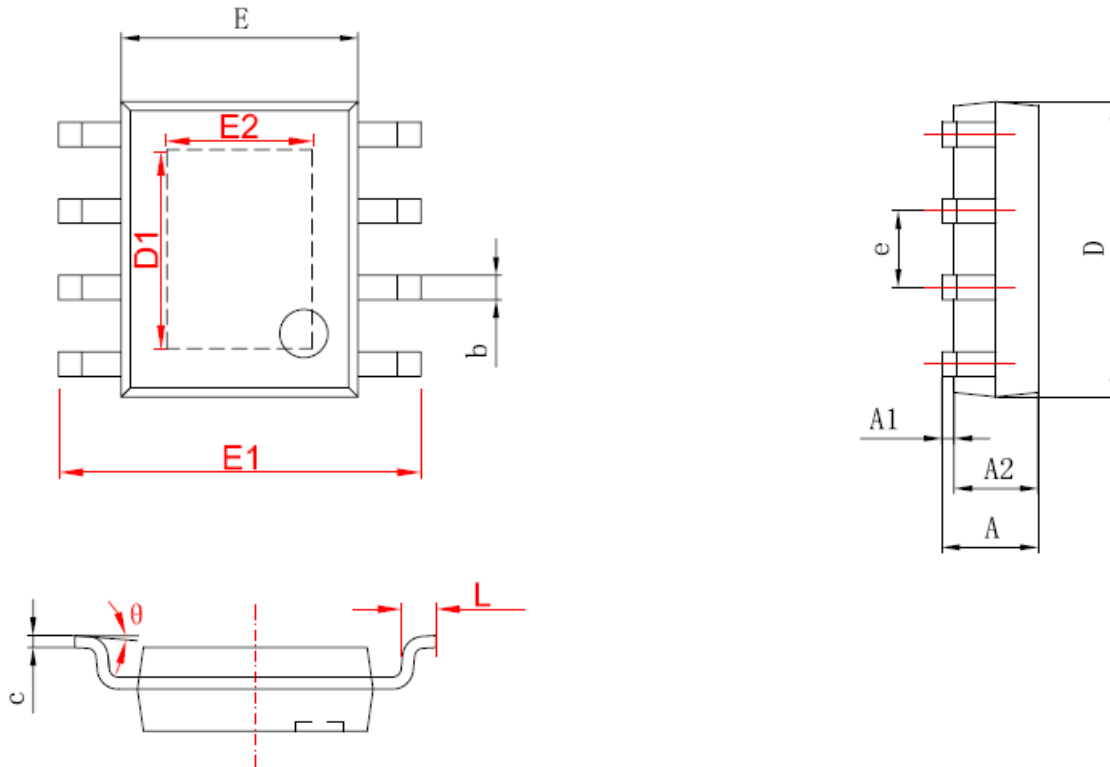

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.050	0.150	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
D1	3.202	3.402	0.126	0.134
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
E2	2.313	2.513	0.091	0.099
e	1.270(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
$\theta$	0°	8°	0°	8°

---

**2.5A 150KHz 50V Synchronous Buck DC to DC Converter****XL9022**

---

**Important Notice**

XLSEMI reserve the right to make modifications, enhancements, improvements, corrections or other changes without notice at any time. XLSEMI does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. XLSEMI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using XLSEMI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards. XLSEMI warrants performance of its products to the specifications applicable at the time of sale, in accordance with the warranty in XLSEMI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent XLSEMI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

For the latest product information, go to [www.xlsemi.com](http://www.xlsemi.com).