

Features

- Operation Voltage: 8V~50V
- Max. Output current capability up to 4A
- Max. Output power up to 30W
- Built in output over power protection
- Built in output short protection function
- Built in output overvoltage protection
- Built in current limit protection function
- Built in thermal shutdown function
- Low quiescent current: 15mA
- Low Distortion: 0.015%, 1kHz, 20W
- Open loop gain up to 90dB
- 94dB Ripple Rejection
- Available in TO220B-5L package

Applications

- Car Audio Amplifiers
- Stage Sound
- Multimedia Speakers
- Open Mobile Sound System

General Description

XL1875 is a mono Class AB audio power amplifier optimized for high voltage, high power and high efficiency. XL1875 has low quiescent current and minimizing system power consumption. XL1875 has excellent audio performance and achieved extremely low distortion levels even at 30W power levels.

The XL1875 built-in over power protection, current limit protection, output overvoltage protection, output short protection, and thermal shutdown protection, which greatly improves the reliability and stability of the chip. The XL1875 achieves 20W@THD=0.015% of output power at an input voltage of $\pm 25V$ and a load impedance of 4Ω or 8Ω , and 30W@THD=1% at an input voltage of $\pm 25V$ and a load impedance of 4Ω or 8Ω . The highly integrated solution can reduce the printed circuit board space while minimizing external components.




Figure1.Package Type of XL1875

Pin Configurations

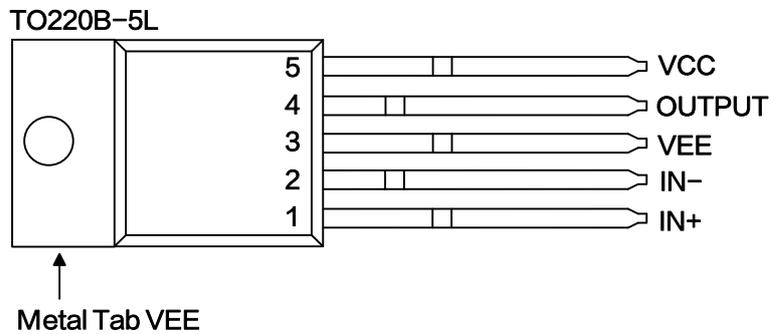


Figure2.Pin Configuration of XL1875

Table 1 Pin Description

Pin Number	Pin Name	Description
1	IN+	Isotropic terminal, audio signal input.
2	IN-	Reverse terminal, negative feedback input.
3	VEE	Ground/negative power supply side.
4	OUTPUT	Power amplifier output.
5	VCC	Positive power supply side.

Function Block

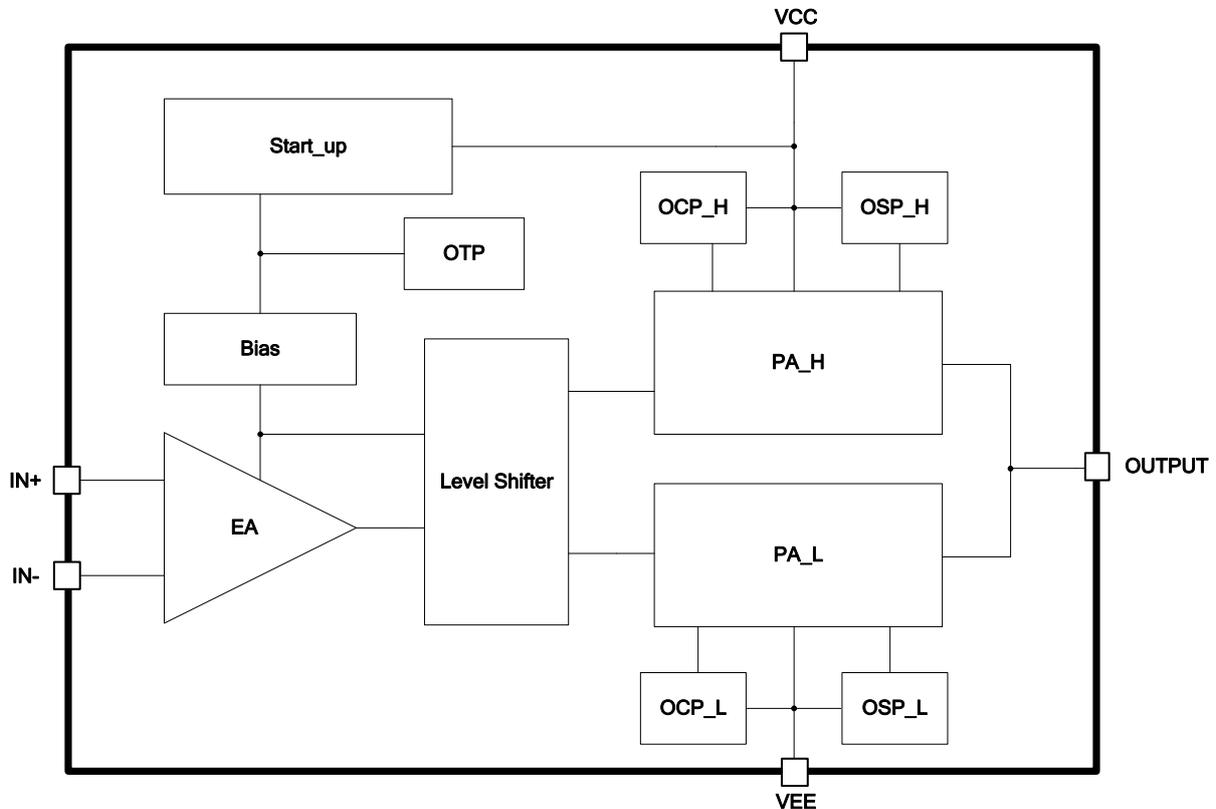


Figure3.Function Block Diagram of XL1875

Typical Application Circuit

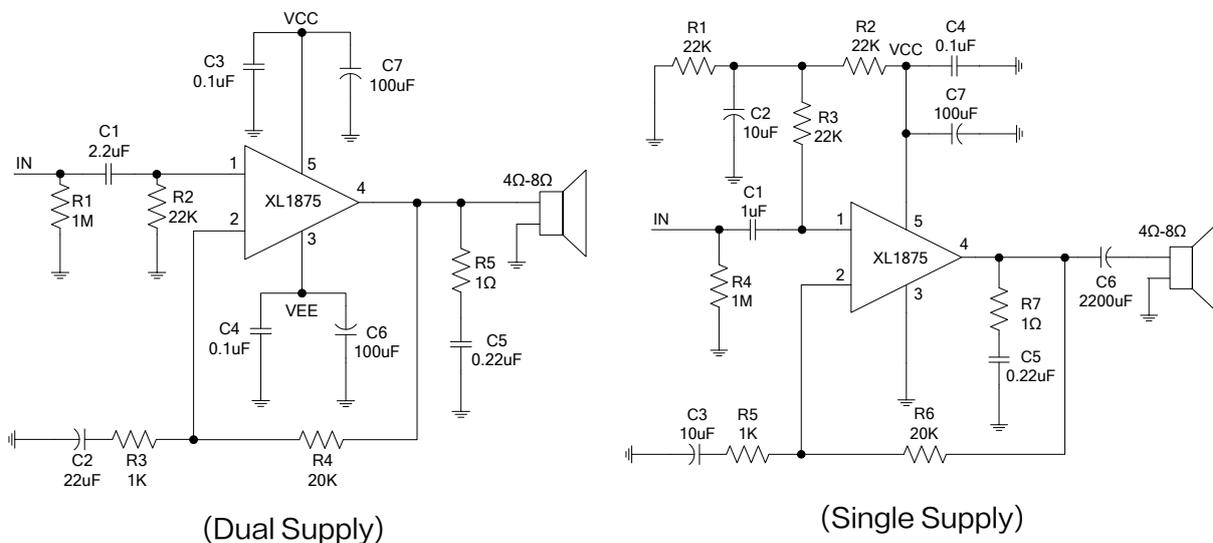


Figure 4.XL1875 Typical Application Circuit

30W 4A 50V High Voltage High Power Audio Power Amplifier

XL1875

Ordering Information

Order Information	Marking ID	Package Type	Eco Plan	Packing Type Supplied As
XL1875	XL1875	TO220B-5L	RoHS & HF	50 Units Per Tube/ 1000Units Per Box

Absolute Maximum Ratings (Note1)

Parameter	Symbol	Value	Unit
Supply Voltage (Single Supply)	V_{CC}	60	V
Supply Voltage (Dual Supply)	V_S	± 30	V
Input Signal Voltage	V_{IN}	$V_{EE} \sim V_{CC}$	V
Thermal Resistance (TO220B-5L) (Junction to Ambient, No Heatsink, Free Air)	R_{JA}	73	$^{\circ}C/W$
Thermal Resistance (TO220B-5L) (Junction to Case)	R_{JC}	3	$^{\circ}C/W$
Power Dissipation ($T_c=75^{\circ}C$) (Note 2)	P_D	20	W
Operating Junction Temperature	T_J	150	$^{\circ}C$
Storage Temperature	T_{STG}	-65~150	$^{\circ}C$
Lead Temperature (Soldering, 10 sec)	T_{LEAD}	260	$^{\circ}C$

Note1: Stresses greater than those listed under Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Note2: For operation at case temperatures above $25^{\circ}C$, derating is performed based on a maximum junction temperature of $75^{\circ}C$ and a thermal resistance of $R_{JC}=3.0^{\circ}C/W$ (junction to case).

30W 4A 50V High Voltage High Power Audio Power Amplifier

XL1875

XL1875 Electrical Characteristics

$T_A = 25^\circ\text{C}$, $V_{CC} = 25\text{V}$, $V_{EE} = -25\text{V}$, $R_L = 8\Omega$, $A_v = 21$ (26dB), $f_0 = 1\text{kHz}$; System parameters test circuit figure4, unless otherwise specified.

Parameters	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Supply Voltage (Single Supply)	V_{CC}	-	8	-	50	V
Supply Voltage (Dual Supply)	V_S	-	± 4	-	± 25	V
Quiescent Supply Current	I_Q	$P_O=0\text{W}$	-	15	-	mA
Output Power (Note3)	P_O	THD=1%	-	30	35	W
Total Harmonic Distortion	THD	$P_O=20\text{W}$, $f_0=1\text{kHz}$	-	0.015	0.4	%
		$P_O=20\text{W}$, $f_0=20\text{kHz}$	-	0.05	0.4	%
Offset Voltage	V_{OS}	-	-	± 3	± 15	mV
Input Bias Current	I_B	-	-	± 0.2	± 2	μA
Input Offset Current	I_{OS}	-	-	0	± 0.5	μA
Gain-Bandwidth Product	GBW	-	-	5.5	-	MHz
Open Loop Gain	A_{VO}	DC	-	90	-	dB
Power Supply Rejection Ratio	PSRR	V_{CC} , 1kHz, 1Vrms	52	95	-	dB
		V_{EE} , 1kHz, 1Vrms	52	83	-	dB
Max Slew Rate	SR	$P_O=20\text{W}$ 70kHz BW	-	8	-	$\text{V}/\mu\text{s}$
Current Limit	I_L	$V_{OUT}=V_S-10\text{V}$	-	3	4	A
Equivalent Input Noise Voltage	V_N	$R_S=600\Omega$, CCIR	-	3	-	μV_{rms}
Thermal Shutdown Temperature	T_{SD}	-	-	150	-	$^\circ\text{C}$
Thermal Shutdown Hysteresis	T_D	-	-	40	-	$^\circ\text{C}$

Note3: Assumes the use of a heat sink having a thermal resistance of $1^\circ\text{C}/\text{W}$ and no insulator with an ambient temperature of 25°C . Because the output limiting circuitry has a negative temperature coefficient, the maximum output power delivered to a 4Ω load may be slightly reduced when the tab temperature exceeds 55°C .

Typical Performance Characteristics

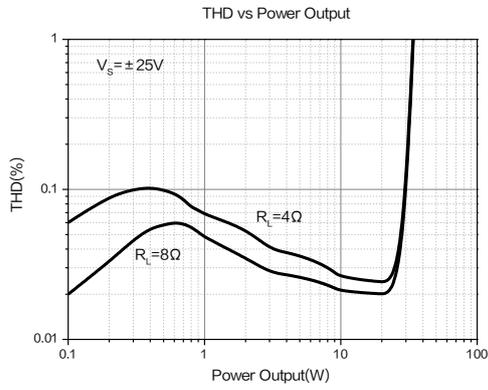


Figure 5. THD vs Power Output

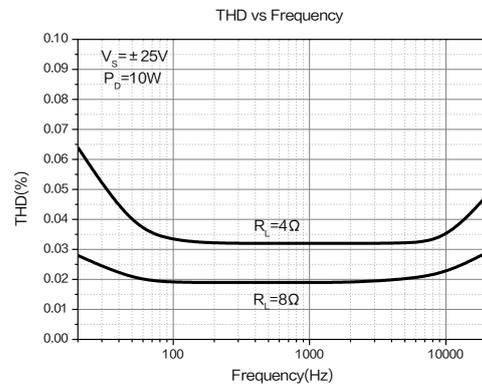


Figure 6. THD vs Frequency

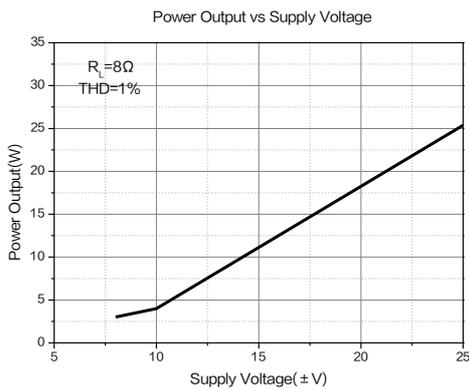


Figure 7. Power Output vs Supply Voltage

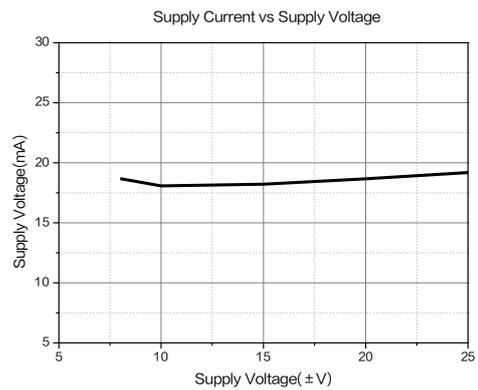


Figure 8. Quiescent Current

30W 4A 50V High Voltage High Power Audio Power Amplifier

XL1875

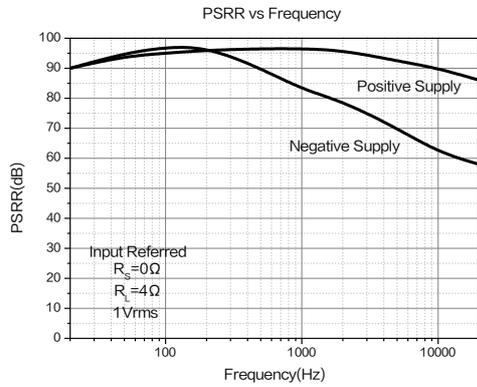


Figure 9. PSRR vs Frequency

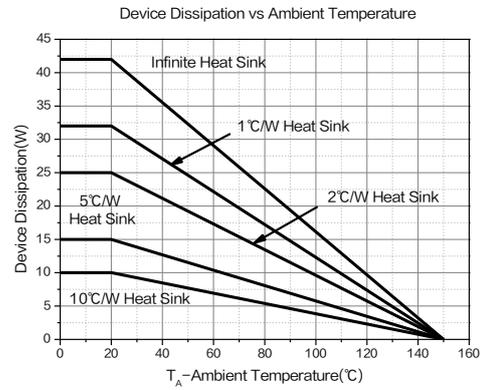


Figure 10. Device Dissipation vs Ambient Temperature

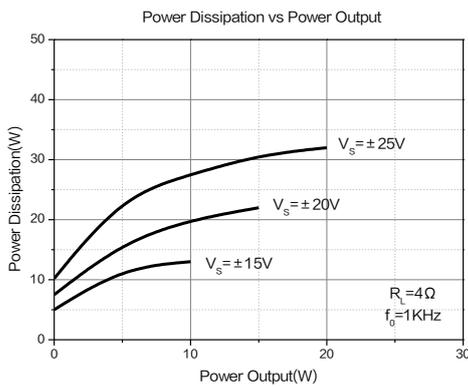


Figure 11. Power Dissipation vs Power Output (4Ω)


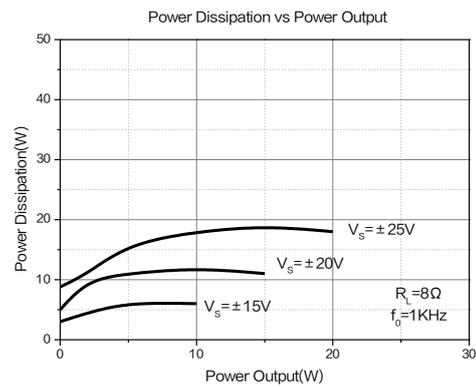


Figure 12. Power Dissipation vs Power Output (8Ω)

Package Information

TO220B-5L

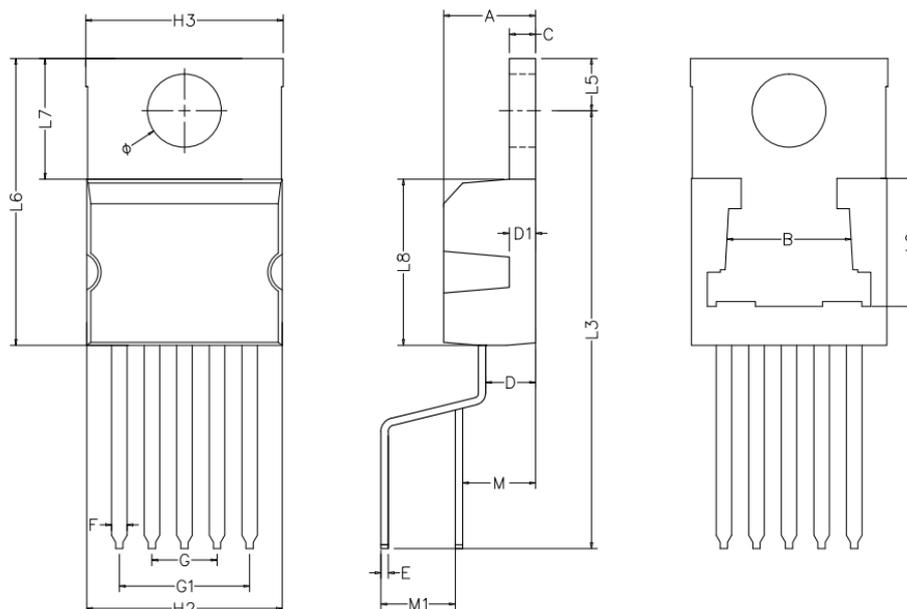

Symbol	Dimensions In Millimeters			Dimensions In Inches		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	4.20	-	4.80	0.165	-	0.189
B	6.50	-	-	0.256	-	-
C	1.20	-	1.37	0.047	-	0.054
D	2.40	-	2.80	0.095	-	0.110
D1	1.20	-	1.35	0.047	-	0.053
E	0.35	0.38	0.55	0.014	0.015	0.022
F	0.75	0.80	0.85	0.030	0.032	0.033
G	3.20	3.40	3.60	0.126	0.134	0.142
G1	6.60	6.80	7.00	0.260	0.268	0.276
H2	9.80	-	10.20	0.386	-	0.402
H3	10.05	-	10.40	0.396	-	0.410
L3	22.50	-	23.50	0.887	-	0.926
L5	2.60	-	3.00	0.102	-	0.118
L6	15.10	-	15.80	0.595	-	0.623
L7	5.60	-	6.20	0.221	-	0.244
L8	9.20	-	9.40	0.362	-	0.370
L9	6.50	-	-	0.256	-	-
M	3.05	3.30	3.55	0.120	0.130	0.140
M1	3.40	3.90	4.40	0.134	0.154	0.173
φ	3.80	-	3.90	0.150	-	0.154

30W 4A 50V High Voltage High Power Audio Power Amplifier	XL1875
--	--------

Important Notice

XLSEMI reserve the right to make modifications, enhancements, improvements, corrections or other changes without notice at any time. XLSEMI does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. XLSEMI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using XLSEMI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards. XLSEMI warrants performance of its products to the specifications applicable at the time of sale, in accordance with the warranty in XLSEMI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent XLSEMI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

For the latest product information, go to www.xlsemi.com.