

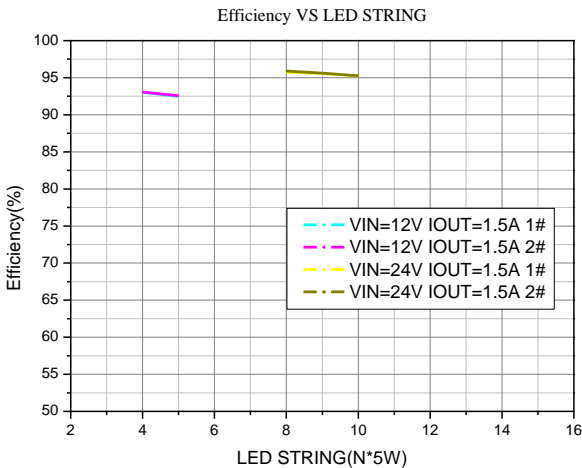
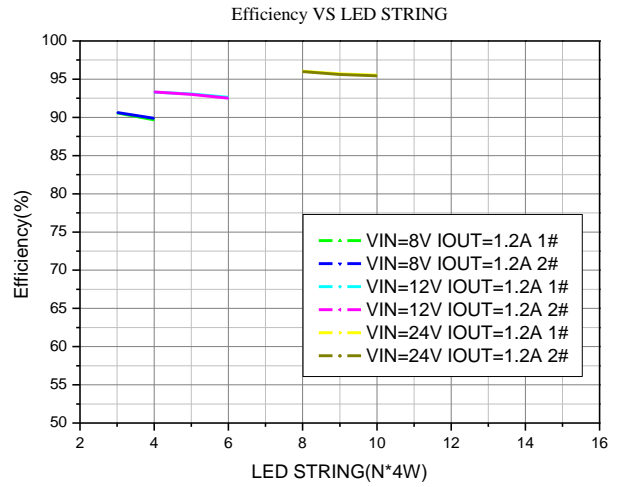
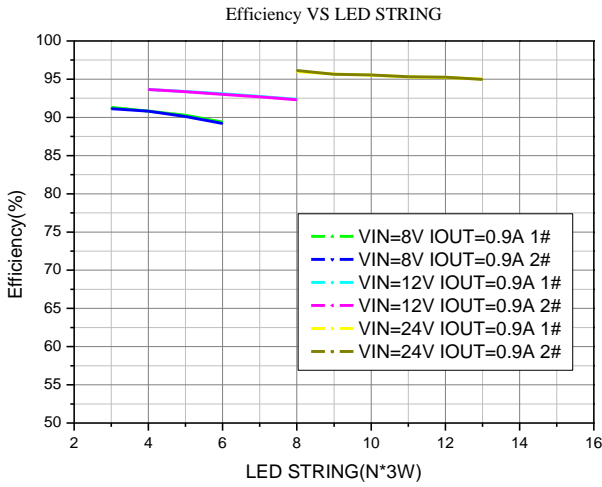


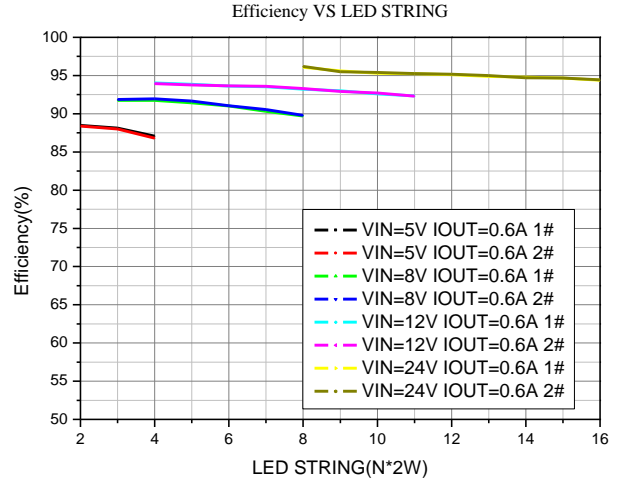

**XL6019+LM358 参考数据**






**1. 输出功率及效率**

测试条件，输入电压 5V/8V/12V/24V，输出 LED 灯串 2-16 串，输出电流 0.3A/0.6A/0.9A/1.2A/1.5A。

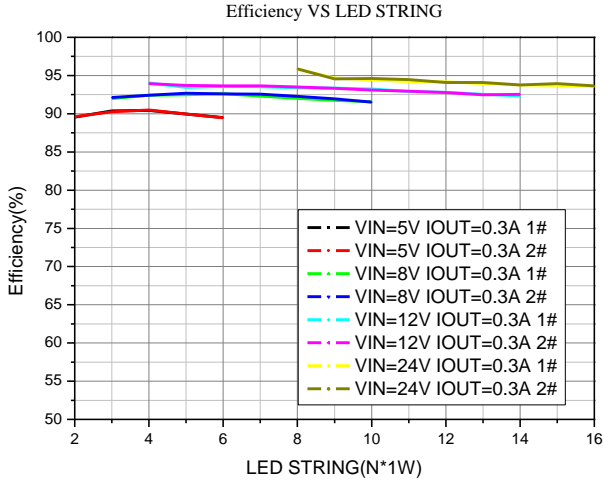

**2. 线性调整率与负载调整率**

测试条件，输入电压 5V/8V/12V/24V，输出 LED 灯串 2-16 串，输出电流 0.3A/0.6A/0.9A/1.2A/1.5A。

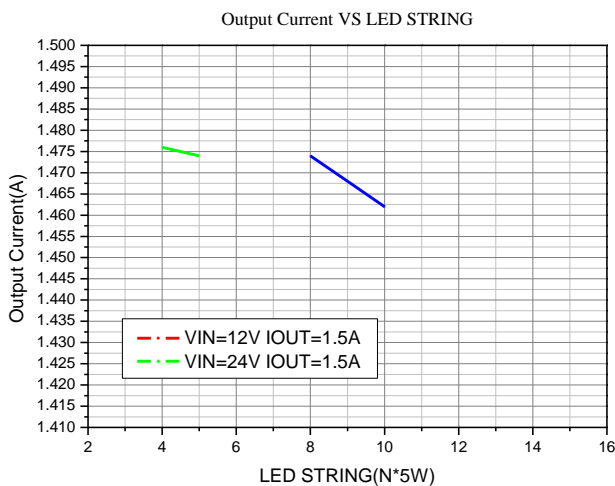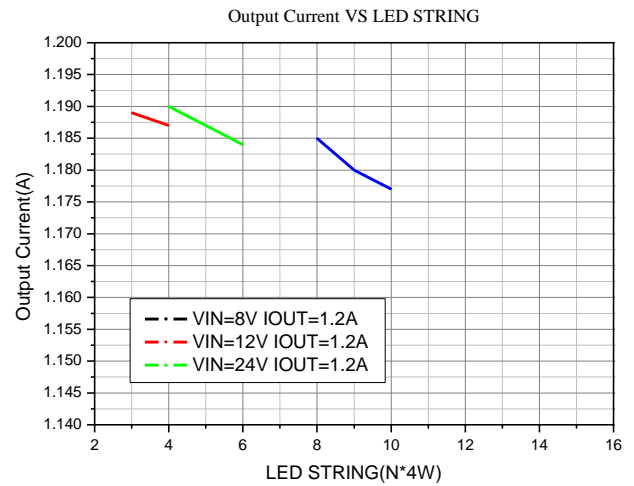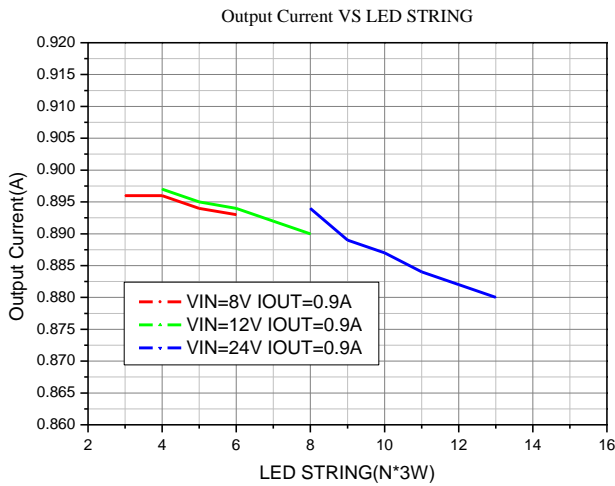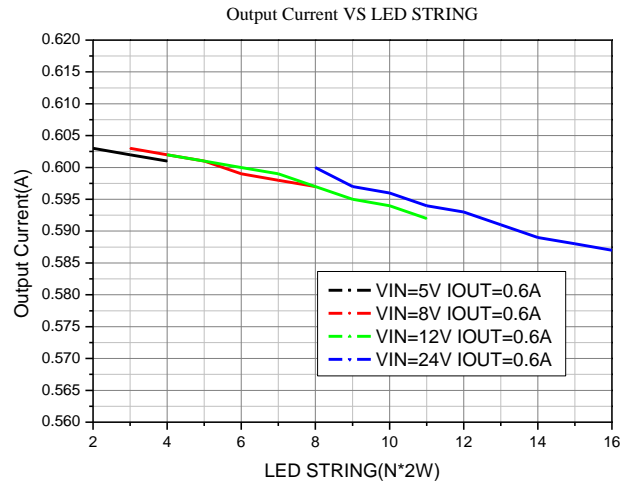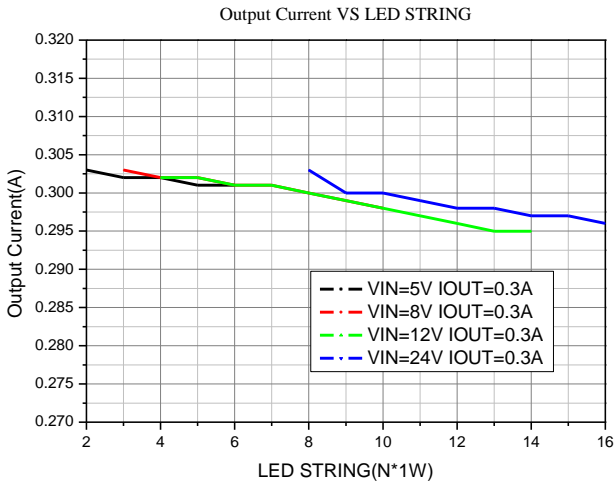

备注：采样电阻误差，造成输出电流初始值低于设定值。